

MDS REMANUFACTURE CORE CRITERIA

Injectors

The cores must meet the minimum technical requirements to ensure the usability for remanufacturing.

The minimum technical requirements are stated below:

- Injectors must be complete with all parts



- Must have undamaged plug/connector



- No damaged PDE electrical connection and/or damaged PDE spring parts



- No heavy rust



- No mechanical damages to core body



- **Actuators for the injectors must be fully functional and qualified from all electrical tests**




Any cores that do not meet the MDS Remanufacture core criteria will be rejected and returned.

Pumps

The cores must meet the minimum technical requirements to ensure the usability for remanufacturing. The minimum technical requirements are stated below:

- All pumps must be OEM, unless otherwise stated
- The pump must rotate 360 degrees
- Pumps must be assembled and complete with all parts undamaged
- Pump shaft must be

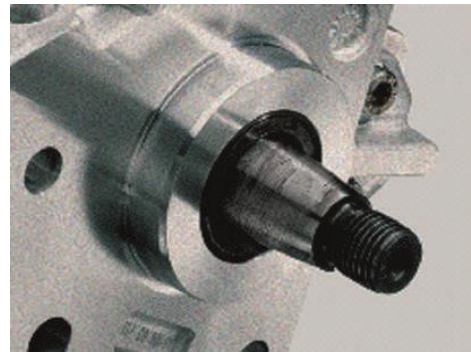

- All fitting plugs and mounting points must be intact
- No physical damages on the pump



Any cores that do not meet the MDS Remanufacture core criteria will be rejected and returned.